

# EK-SYSTEMS INC

1485 G. LANDMEIER RD ELK GROVE VILLAGE, IL 60007

PH: 847-981-0003

FAX: 847-981-9333

## piccolo™ Controller SERIES



### P304 1/4 DIN Melt Pressure Indicator/Controller Specification Sheet

- Easy to integrate and use in new and legacy applications
- Fast-acting alarms to protect against overpressure
- Responsive, precision PID control with overshoot inhibit
- Easy, effective auto-tune
- Universal + strain gauge inputs
- Second input for differential pressure indication / control
- Analogue retransmission
- Easy and flexible configuration via PC software or front panel
- Modbus RTU digital communications
- High visibility three colour LED display
- Wipedown, customizable front fascia
- High reliability and quality
- Three year warranty

The Invensys Eurotherm piccolo™ P304i Melt Pressure indicator and P304c controller offer versatile solutions with advanced features and a wide range of hardware options that make them ideal for all types of plastic processing. Both units have a 50ms sample rate to give the fast-acting control and alarm functionality required in the plastics industry. The P304c controller provides outstanding control performance in an affordable package for a wide variety of pressure sensors.

#### Input/output flexibility

A strain gauge or process linear input is standard with an optional strain gauge input for differential pressure control, or a universal input for remote setpoint. Up to two opto-isolated DC linear outputs are available for control or retransmission along with one standard logic input for alarm reset/acknowledge or zero calibration of sensor. An additional four logic inputs may be selected for remote activation of functions like auto/manual mode selection and increase/ decrease of power output.

#### The display

A custom, dual-line 5-digit display provides a complete view of the process while a horizontal bar graph gives clear visual indication of the process input. The status of alarms, outputs, active setpoint and engineering units are represented with clear beacons on the front of the unit.

#### Configuration

The P304 is fully software configurable using iTools PC configuration and parameter monitoring. iTools provides the ability to edit, store and 'clone' complete controller configurations as well as data logging and process monitoring capability.

#### Ideal for:

- All types of plastic processing applications including extrusion and injection molding


# EK-SYSTEMS INC

## P304i Melt Pressure Indicator

The P304i is a fully programmable indicator with a single input configured for melt pressure measurement and the choice of wiring either strain gauge or amplified transducers to the unit. An optional second input provides an additional facility for differential pressure measurement if required.

The update time for each channel is 50ms to respond to very fast processes. To provide full process measurement, the second input can be configured for either Thermocouple or RTD temperature measurement.

Three preconfigured and ready to use alarms are associated to the process to detect high and low pressure conditions. A flexible alarm strategy enables shutdown of extruder at dangerous pressure levels.

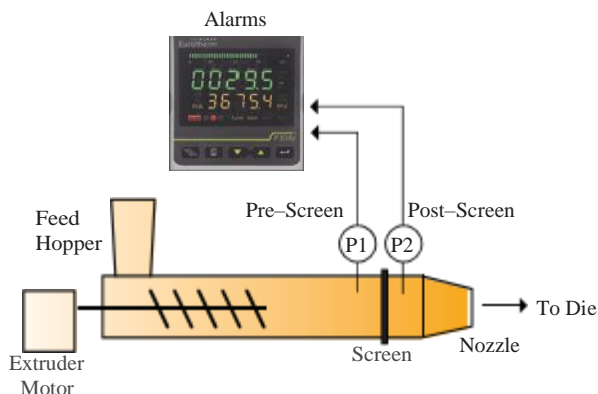

## P304c Melt Pressure Controller

The P304c Melt Pressure Controller provides accurate pressure or differential pressure control, ideal for plastic applications.

A clear display shows the main PV value along in the main area with a secondary variable beneath. The process input is also shown with a 35 point bar graph. Up to 24 dedicated LED beacons are further included to provide the operator with good visibility of the whole process status.

Accurate PI/PID control for Die Pressure gives fast and constant closed loop pressure control to give excellent process performance. Pre-tuning and adaptive self-tuning algorithms further ensure good tuning of the control without the need for specific operator expertise.

A remote setpoint option, which can be either voltage or current, enables setpoint generation by a master controller or PLC. A wide range of control and retransmission linear outputs can also be selected without the use of hardware jumpers.

## Specification

### General

Environmental performance	
Temperature limits operation:	0 to 50°C (32 to 122°F)
Storage:	-20 to 70°C (-4 to 158°F)
Humidity limits operation:	0 to 85% RH non condensing
Panel sealing:	IP55
Altitude:	<2000 metres
Atmospheres:	Not suitable for use in explosive or corrosive atmosphere

### Electromagnetic compatibility (EMC)

Emissions and immunity:	Compliant with the European Directive 2004/108/CE according to Product Standard EN 61326-1
-------------------------	--

### Electrical safety

(BS EN61010):	Installation cat. II; Pollution degree 2
---------------	--

### INSTALLATION CATEGORY II

The rate impulse voltage for equipment on nominal 230V mains is 2500V.

### POLLUTION DEGREE 2

Normally, only non-conductive pollution occurs. Occasionally, however, a temporary conductivity caused by condensation shall be expected.

### Physical

Panel mounting:	1/4 DIN
Weight:	650g
Panel cut-out dimensions:	92W x 92Hmm
Panel depth:	128mm

### Operator interface

Type:	LED
Main PV display:	5 digits, green, 13.3mm high
Secondary display:	5 digits, amber, 10.7mm high
Bar graph:	35 segments, green with 3% resolution
Status beacons:	4 engineering units, 3 alarms, 18 active status beacons, including engineering units and alarms

### Power requirements

Main power supply:	100 to 230V ac 50/60Hz
Power supply variation:	100 to 230V ac 50/60Hz $\pm$ 15%
Power consumption:	Max 22VA at 50Hz; Max 27VA at 60Hz
Optional power supply:	24V ac/dc
Power supply variation:	From 14 to 30V ac From 14 to 32V dc
Power consumption:	Max 18VA at 24V ac 50/60Hz; Max 12W at 24V dc

### Approvals

CE, cUL  
RoHS 2

### Transmitter Power Supply TPSU (optional on P304i)

Rating:	24V dc $\pm$ 2% 1.5 W
Isolation:	From input / output

### Communications

#### Serial communications option

Protocol:	Modbus RTU slave
Transmission standard:	EIA485

### Process Variable Input

Strain gauge input:	From 340 to 5000 $\Omega$ bridge
Sensitivity:	1-4mV/V
Connection:	4 or 5-wire (5 uses internal shunt)
Excitation:	10V $\pm$ 7%
Calibration accuracy:	$\pm$ 0.1% fsv $\pm$ 1 digit @ 25°C $\pm$ 1°C
Input span:	-25/125% of full scale (approx. 10/50mV)
Linear input:	0-5V dc, 0-10V dc, 0-20mA, 4-20mA
Sample rate:	50 ms (typical)
Resolution:	4000 counts/12 bits
Zero balance:	$\pm$ 25% of full scale (approximately $\pm$ 10mV)
Drift with temperature:	<300 ppm/K of full span for current, voltage and strain gauge input
Common mode rejection:	>120dB @ 50/60Hz
Series mode rejection:	>60dB @ 50/60Hz

Website: [www.ek-systems.com](http://www.ek-systems.com)

email: [ek-systems@juno.com](mailto:ek-systems@juno.com)

# EK-SYSTEMS INC

## Secondary Process Variable Input

Strain gauge input: For differential pressure calculation  
 Input features: See main input  
 Linear input: P304c only: For differential pressure or remote setpoint  
 Input features: See main input  
 Thermocouple: P304i only: J, K, L, N, T, E  
 RTD Resistance P304i only: 3-wire Pt100, Pt500  
 Input impedance: >1M $\Omega$  for thermocouple input  
 <10 $\Omega$  for linear current input  
 >165k $\Omega$  for linear voltage input  
 Sample rate temperature input: 100, 200, 500 or 1000ms

## Main Analogue Output

Function: P304i: PV retransmission  
 P304c: Control output  
 Rating: Configurable between:  
 0/10 VDC, min. load 5k $\Omega$   
 -10/+10 VDC, min. load 5k $\Omega$   
 0/5 VDC min. load 5k $\Omega$   
 0/20 mA, max. load 500 $\Omega$   
 4/20 mA, max. load 500 $\Omega$   
 Accuracy: 0.1% in manual mode, 0.03% in automatic mode  
 Resolution: 0.1% of output span  
 Isolation: From input / output  
 Output filter: Selectable: OFF, 0.4, 1, 2, 3, 4, 5s

## Secondary Analogue Output

Function: P304i: Configured as pressure or temperature input retransmission  
 P304c: Acts as pressure input retransmission  
 Output features: See main output

## Relay Output

Alarm 1-2  
 Type: Form C (changeover)  
 Rating: 2A max @ 240V ac resistive load  
 Functions: Process alarm  
 Alarm 3  
 Type: Form A (normally open)  
 Rating: 2A max @ 240V ac resistive load  
 Functions: Process alarm

## Digital Input

Reset/Cal (P304c and P304i)  
 Isolation: None from PV  
 Functions: Configurable as:  
 Alarm reset  
 Peak reset  
 Alarm and peak reset  
 Zero calibration of the primary input  
 Zero calibration of the primary input, alarm and peak reset

## 1-2-3-4 (P304c only)

Isolation: Opto-isolated from input/output  
 Functions: Dig In 1: Automatic/manual control  
 Dig In 2: Control output value increase  
 Dig In 3: Control output value decrease  
 Dig In 4: Automatic to manual mode setting to zero the control output

## Software Features

Control  
 Number of loops: 1  
 Control loop update: 50ms (typical)  
 Control types: PI/PID  
 Modes: Auto, manual, forced manual  
 Autotune: Tune algorithm from manual mode.  
 Adaptive algorithm in auto mode

## Transducer calibration

Calibration types: With or without shunt resistor  
 Shunt resistor: Programmable from 40 to 100%, default 80%

## Alarms

Number: 3  
 Type: Absolute high & low, deviation high, low or band  
 Low masked on start up  
 Auto / Manual reset

## Other features

Peak monitor: Stores high or low values  
 Automatic stand-by: Avoids overshoot caused by temporary process interruptions

## Order codes

### P304i Melt Pressure Indicator



#### Basic Product

P304i ¼ DIN Indicator

#### 1 Function

AL Pressure indicator

#### 2 Power Supply

VH 100-230V ac  
 VL 24V ac/dc

#### 3 Second input

XXX None  
 PV2 Linear, TC, RTD, Strain gauge

#### 4 Options

XXXX None  
 SDXX 24V dc TPSU +  
 2nd DC retransmission  
 SD4X 24V dc TPSU +  
 2nd DC retransmission  
 + RS485

#### 5 Custom Label

XXXXX None

#### 6 Special

XXXXXX None

### P304c Melt Pressure Controller



#### Basic Product

P304c ¼ DIN Controller

#### 1 Function

CC Pressure controller

#### 2 Power Supply

VH 100-230V ac  
 VL 24V ac/dc

#### 3 Second input

XXX None  
 RSP Analogue setpoint or second PV input (differential pressure)

#### 4 Options

SDXX 24V dc TPSU +  
 2nd DC retransmission  
 SD4L 24V dc TPSU +  
 2nd DC retransmission  
 + RS485 + 4 logic inputs

#### 5 Custom Label


XXXXX None

#### 6 Special

XXXXXX None


# EK-SYSTEMS INC

## Mechanical Details

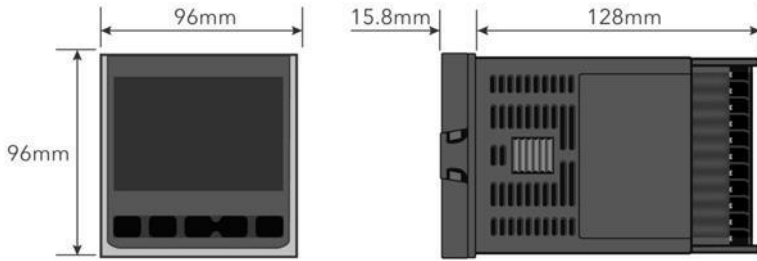


Panel cut-out 92mm (-0.0 +0.8) x 92mm (-0.0 +0.8)

## P304i Indicator Rear Terminals

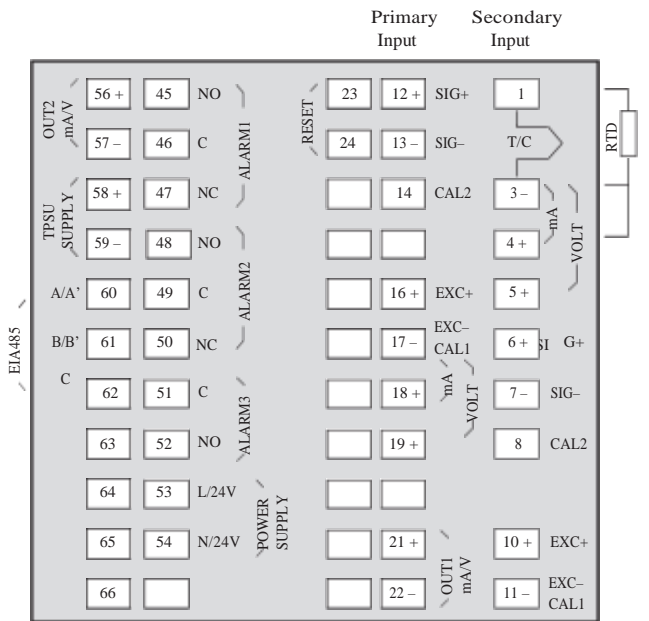

## P304c Controller Rear Terminals

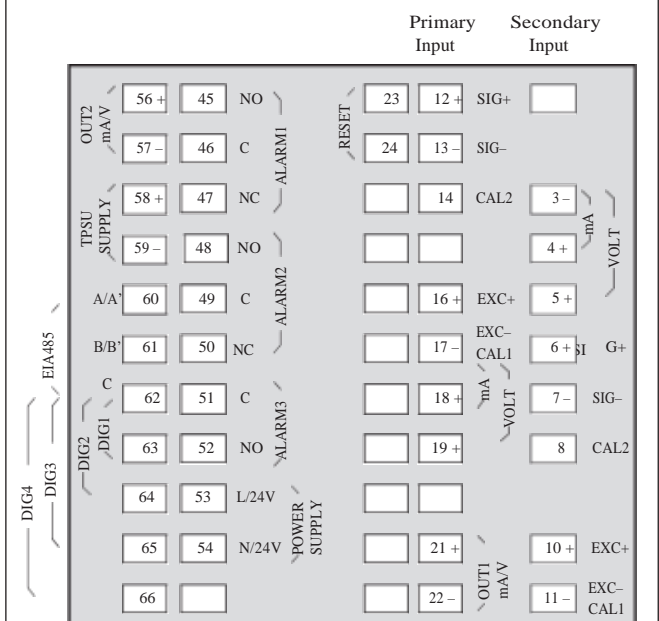

**FOR MORE INFO CONTACT US:**

**PHONE: 847-981-0003**

**FAX: 847-981-9333**

**EMAIL: [ek-systems@juno.com](mailto:ek-systems@juno.com)**

**Website: [www.ek-systems.com](http://www.ek-systems.com) email: [ek-systems@juno.com](mailto:ek-systems@juno.com)**